

SPECIFICATIONS

DAS-406B

DC Dynamic Strain Amplifier

SPEC.No.EN341406B-B

1/2

1. Specifications

- Measuring point 1 point per 1 set
- Applicable gage resistance 60 to 1 k
- Gage factor 2.00
- Bridge power supply DC2 V(DC1 V, 4 V or 10 V changeable)
with remote sensing applied.(50 mA or less)
- Balancing adjustment range
Approx. $\pm 1\%$
(Gage resistance 120 Approx. $\pm 5\,000 \times 10^{-6}$ strain)
- Balancing adjustment method Auto balance
Resistance Section Auto-balancing time Approx.1 s, Accuracy $\pm 0.1\%$ F.S.
Back-up time 24 h or more
- Sensitivity 0.5 V output at the input of 100×10^{-6} strain
(When bridge power supply is DC2 V.)
- Output MONITOR ± 10 V, ± 5 mA(Load resistance 2 k or more)
OUTPUT ± 10 V, ± 30 mA(Load resistance 330 or more)
Output resistance 10 or less
Output capacity load 0.1 μ F or less
- Non-linearity Within $\pm 0.01\%$ F.S.
- Standard equivalent strain(CAL) Set with digital switch ± 1 to $\pm 9\,999 \times 10^{-6}$ strain
Accuracy Within $\pm 0.2\%$ F.S. for each point
- Sensitivity adjustment range(ATT) 1, 1/2, 1/5, 1/10, 1/20, 1/50, 1/100, 0
Accuracy Within $\pm 0.2\%$ F.S. for each point
GAIN volume variable range 1 to 1/2.5 times continuously variable adjustment(VAR)
- Frequency response range DC to 200 kHz + 1 dB, - 3 dB(with W/B filter)
- Low-pass filter 10 Hz, 100 Hz, 1 kHz, 10 kHz, W/B Third bessel type
- S/N ratio 46 dB_{P-P}(ATT = 1) with W/B condition
55 dB_{P-P} with 10 Hz to 10 kHz
- Display Output voltage display 0.00 to ± 10.00
Digital display(Green LED)
Sampling rate Approx.4 times/s
0.00 or - 0.00 flashes when output voltage is in non-linearity zone
- Stability
 - Temperature efficient
 - Zero shift $\pm 1 \times 10^{-6}$ strain/
 - Sensitivity variation $\pm 0.01\%$ F.S/
 - Efficient due to time
 - Zero shift $\pm 5 \times 10^{-6}$ strain/8 h
 - Sensitivity variation $\pm 0.05\%$ F.F/8 h
 - Efficient due to power supply
 - Zero shift $\pm 1 \times 10^{-6}$ strain/variation of power supply voltage within $\pm 10\%$
 - Sensitivity variation $\pm 0.01\%$ F.S./variation of power supply voltage within $\pm 10\%$
- Alarm function 0.00 or - 0.00 flashes when output reaches out of warranty range of non-linearity
- Remote function Auto-balance • \pm CAL function

SPECIFICATIONS


2. General specifications

- Operating temperature/humidity range
 - Temperature - 10 to 50
 - Humidity 85 %RH or less (Non condensing)
- Power supply
 - Power supply voltage AC100 V ± 10 V
 - Power supply frequency 50/60 Hz
 - Power consumption Approx.10 VA (at AC100 V)
- Withstand voltage AC1 500 V 1 min between power supply line and case
- Vibration resistance 29.42 m/s²{3 G}
- Outline dimensions (W × H × D) 42 mm × 176 mm × 284.4 mm (excluding protrusion.)
- Weight Approx.1.5 kg


3. Accessories

- Instruction manual 1 piece
- Power cable 1 piece
- Fuse 1 piece
- Driver(Small) 1 piece

Panel cut size

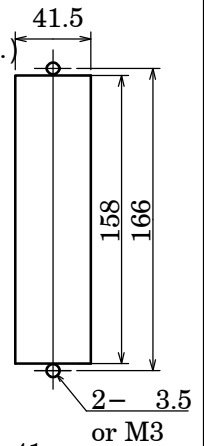

4. Outline dimensions

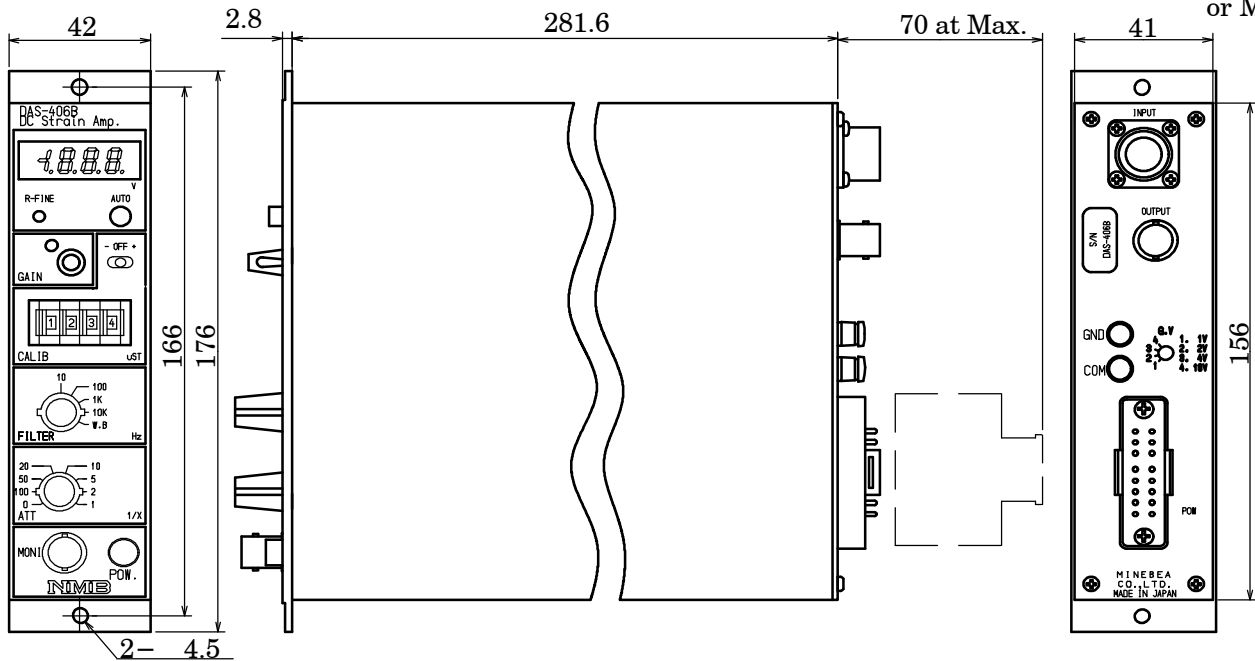

Unit : mm

Specifications and outline dimensions and so on which have printed may subject to change for the purpose of improvement.